

Philips Selecon Display Profile - CDM

****OPERATION MANUAL****


THIS INFORMATION IS DESIGNED TO PROVIDE YOU WITH THE INFORMATION YOU NEED IMMEDIATELY UPON DELIVERY OF YOUR NEW LUMINAIRE.



If you require further assistance please contact your Philips Selecon dealer. www.seleconlight.com/distributors

KEY OPERATING POINTS AND FEATURES

- A: Pan lock.
- B: Tilt lock.
- C: Lamp lid latch.
- D: Shutter lock.
- E: Four beam masking shutters.
- F: Pattern rotation / alignment.
- G: Lens lid locking latch. Open this to insert colour frames and accessories.
- H: Colour frame and accessory holder.
- I: Lens focus knobs.
- J: Lens tube rotation lock.
- K: Lamp socket.
- L: Lamp peak / flat adjustment.
- M: Pattern holder.

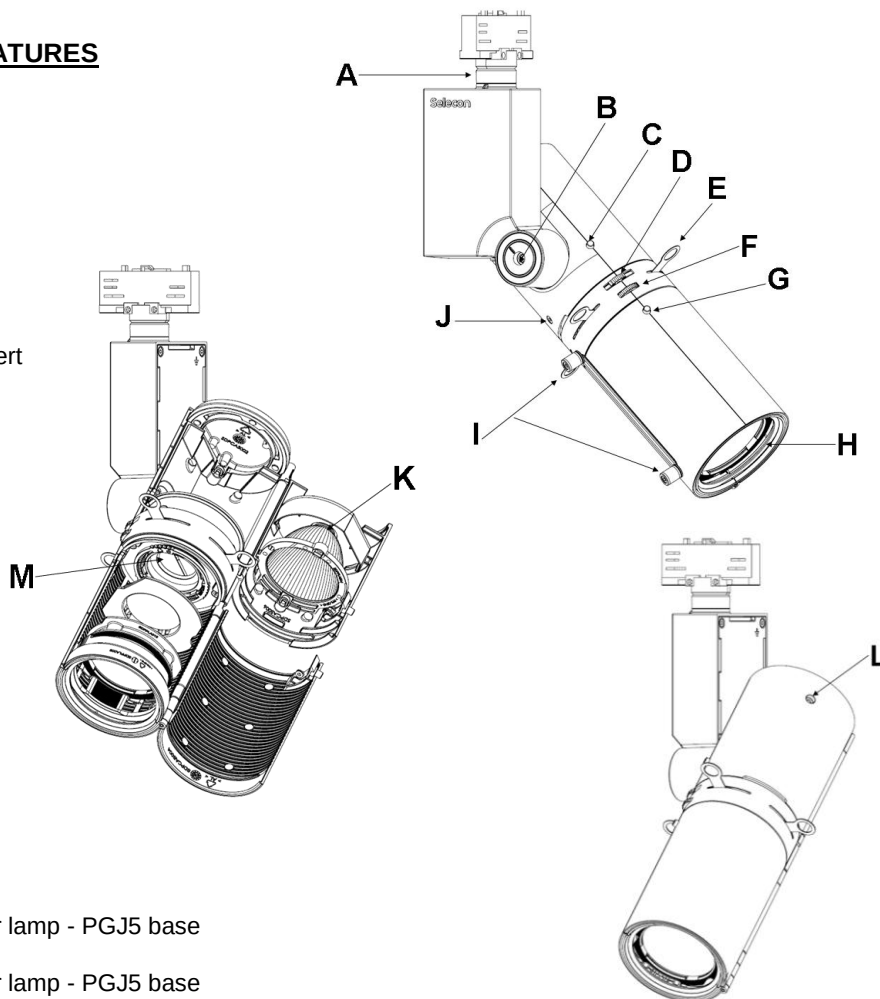

LAMPING UP

- 20W CDM -Tm Philips Mini Master lamp - PGJ5 base
- 35W CDM -Tm Philips Mini Master lamp - PGJ5 base

The Philips Selecon Display Profile is supplied with the recommended lamp. Carefully read the manufacturers instructions for safe lamp handling / use and disposal of used lamps. Replace with the recommended lamp only. Spares are available from your Selecon dealer: www.seleconlight.com/distributors

To insert the lamp, push in the lid locking latch on the lamp housing and open the lid. Insert the lamp into the lamp base.

The Philips Selecon Display Profile has a built-in ballast to convert from your local voltage to the voltage required by the lamp. Once you have installed the lamp your luminaire should be ready for use.


Recommendation to 'Burn-In' CDM-Tm Lamps

Due to colour shifts in new CDM-Tm lamps we recommend that these lamps are run continuously for a minimum 'burn-in' period of 20hrs prior to final installation.

ACCESSORIES

- Colour frame for plastic filter
- Linear glass diffuser
- Medium diffusion glass
- UV glass filter
- Glass colour filter - primary blue, green, red and yellow
- Glass dichroic colour filter

PATTERN USE

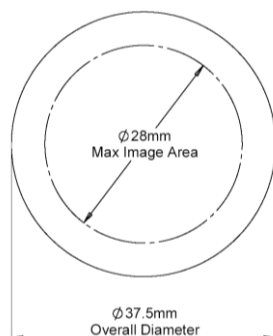

Pattern size: E
Outside diameter: 37.5mm
Image area: 28mm

Tips to achieve the best results:

- Always use black matt finish patterns as these reduce internal light reflections.
- For custom / text logos please ensure the design is inside the 28mm diameter area.

The Philips Selecon Display Profile is supplied with an internal pattern holder. To fit your pattern, remove the internal pattern holder from its magnetic mounting plate. Unclip the locking plate and insert the pattern with correct orientation. Re-clip the locking plate and place the pattern holder back on the magnetic mounting plate. Align using the Gobo Rotation Knob

(F).

Mounting options include track adaptors, ceiling mount plate, suspension hook clamp.

For full details contact your Philips Selecon dealer: www.seleconlight.com/distributors

SAFETY AND MAINTENANCE

Keep your Philips Selecon Display Profile in top condition and performing at its best by cleaning it regularly with a soft cloth.

The above is the only maintenance task that can be safely carried out by non approved personnel.

Philips Selecon has manufactured this luminaire in accordance with recognised best practices to recommended international safety standards. It is your responsibility to maintain this luminaire in good and safe working condition.

Repairs should only be carried out by suitably qualified persons. Do not operate the luminaire with damaged lamps or cable, etc. Consult your Philips Selecon distributor for assistance. Only replace damaged parts with authorised SDP spare parts.

N.B. Luminaire electrical cable – your Philips Selecon Display Profile is fitted with special heat resistant flexible cable, replace with genuine SDP spare part cable kit only – please refer to your Selecon distributor.

(Replacement cable kits are supplied complete with necessary terminal connectors).

ELECTRICAL INSTALLATION

WARNING!!!

Risk of fire and electric shock. This product is to be installed by a qualified electrician only. This luminaire employs a grounded type receptacle and is not intended for connection to a two-wire, ungrounded source of supply.

When installing this luminaire use wire conductor colour codes as follows:

230V	Brown	- Phase, Live	120V	Black	- Phase, Live
	Blue	- Neutral, Return		White	- Neutral, Return
	Green/Yellow	- Earth		Green	- Earth

LIMITED WARRANTY

Philips Selecon ("Selecon") warrants all Philips Selecon luminaires against defects in materials or workmanship. The term of this warranty is **three years**; from the date of delivery, and is dependant on the following operating conditions:

FOR ARCHITECTURAL DISPLAY: the SDP luminaire is used as a display light and in conditions typically found in a museum being 10 to 12 hours daily, 7 days per week.

For full details of the Philips Selecon Warranty, please refer to our website: www.seleconlight.com

Australian customers please refer to the Australia specific warranty card included with this product.

Manufacturer

Philips Selecon, 19-21 Kawana Street, Northcote, Auckland 0627, New Zealand
Ph: +64 9 481 0100, Fax: +64 9 481 0101
www.seleconlight.com